



## Description

Low noise ceiling mount ventilating fan rated for continuous running. Fan is ENERGY STAR® qualified, HVI, UL, and cUL certified, and can be used to comply with ASHRAE 62.2 (intermittent operation), CA Title 24, and CALGreen requirements.

(100 CFM)

## Motor/Blower


- Power rating of 120volts / 60Hz.
- DC brushless motor engineered to run continuously.
- Motor equipped with thermal cutoff fuse.
- Permanently lubricated motor.

## Housing

- Galvanized steel body.
- Detachable 4" diameter duct adapter.
- Built-in backdraft damper.
- Easy installation.

## DC Motor Technology

- Built-in soft start function to increase bearings' life.
- Automatically powers off when the impeller is locked abnormally.

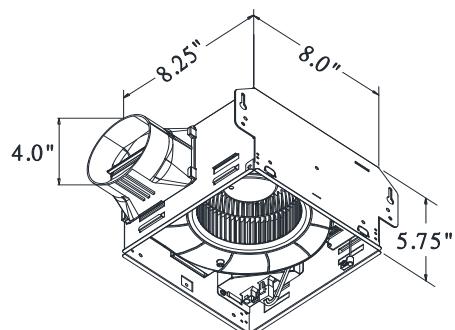

## Grille

- Attractive design using ABS material.
- Attaches to housing with included grille bracket.

## Light

- 26-Watt GU24 CFL.

## LED Indicator



- Turn the power switch on/off to operate on/off. LED indicator will be green when power is on.

## Warranty

- 3-year limited warranty.

## Feature

- For ceiling mount only, airflow of 100 CFM ( $\pm 10\%$ ) and 1.4 sones at 0.1" static pressure.
- Power consumption approximately 13.9 Watts with an efficiency rating approximately 7.1 CFM/Watt at 0.1" static pressure.
- UL and cUL listed for tub/shower enclosure when used with GFCI-protected branch circuit wiring.

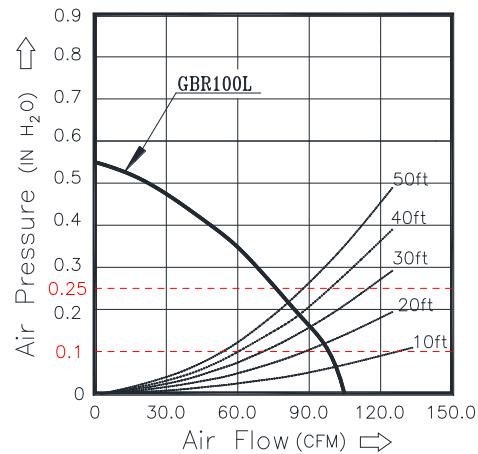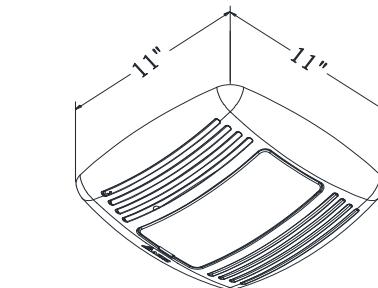

GBR100L	4" Duct (Standard)	
Static Pressure (inches w.g.)	0.1	0.25
Air Flow (CFM)	100	76
Sones	1.4	1.3
Power Consumption (Watts)	13.9	11.9
Energy Efficiency (CFM/Watt)	7.1	6.3
Current (Amps)	0.23 @ 120Vac	
Power Rating (V/Hz)	120 / 60	

Model	Quantity	Comments	Project:
			Location: Architect: Engineer: Contractor: Submitted by: Date: